

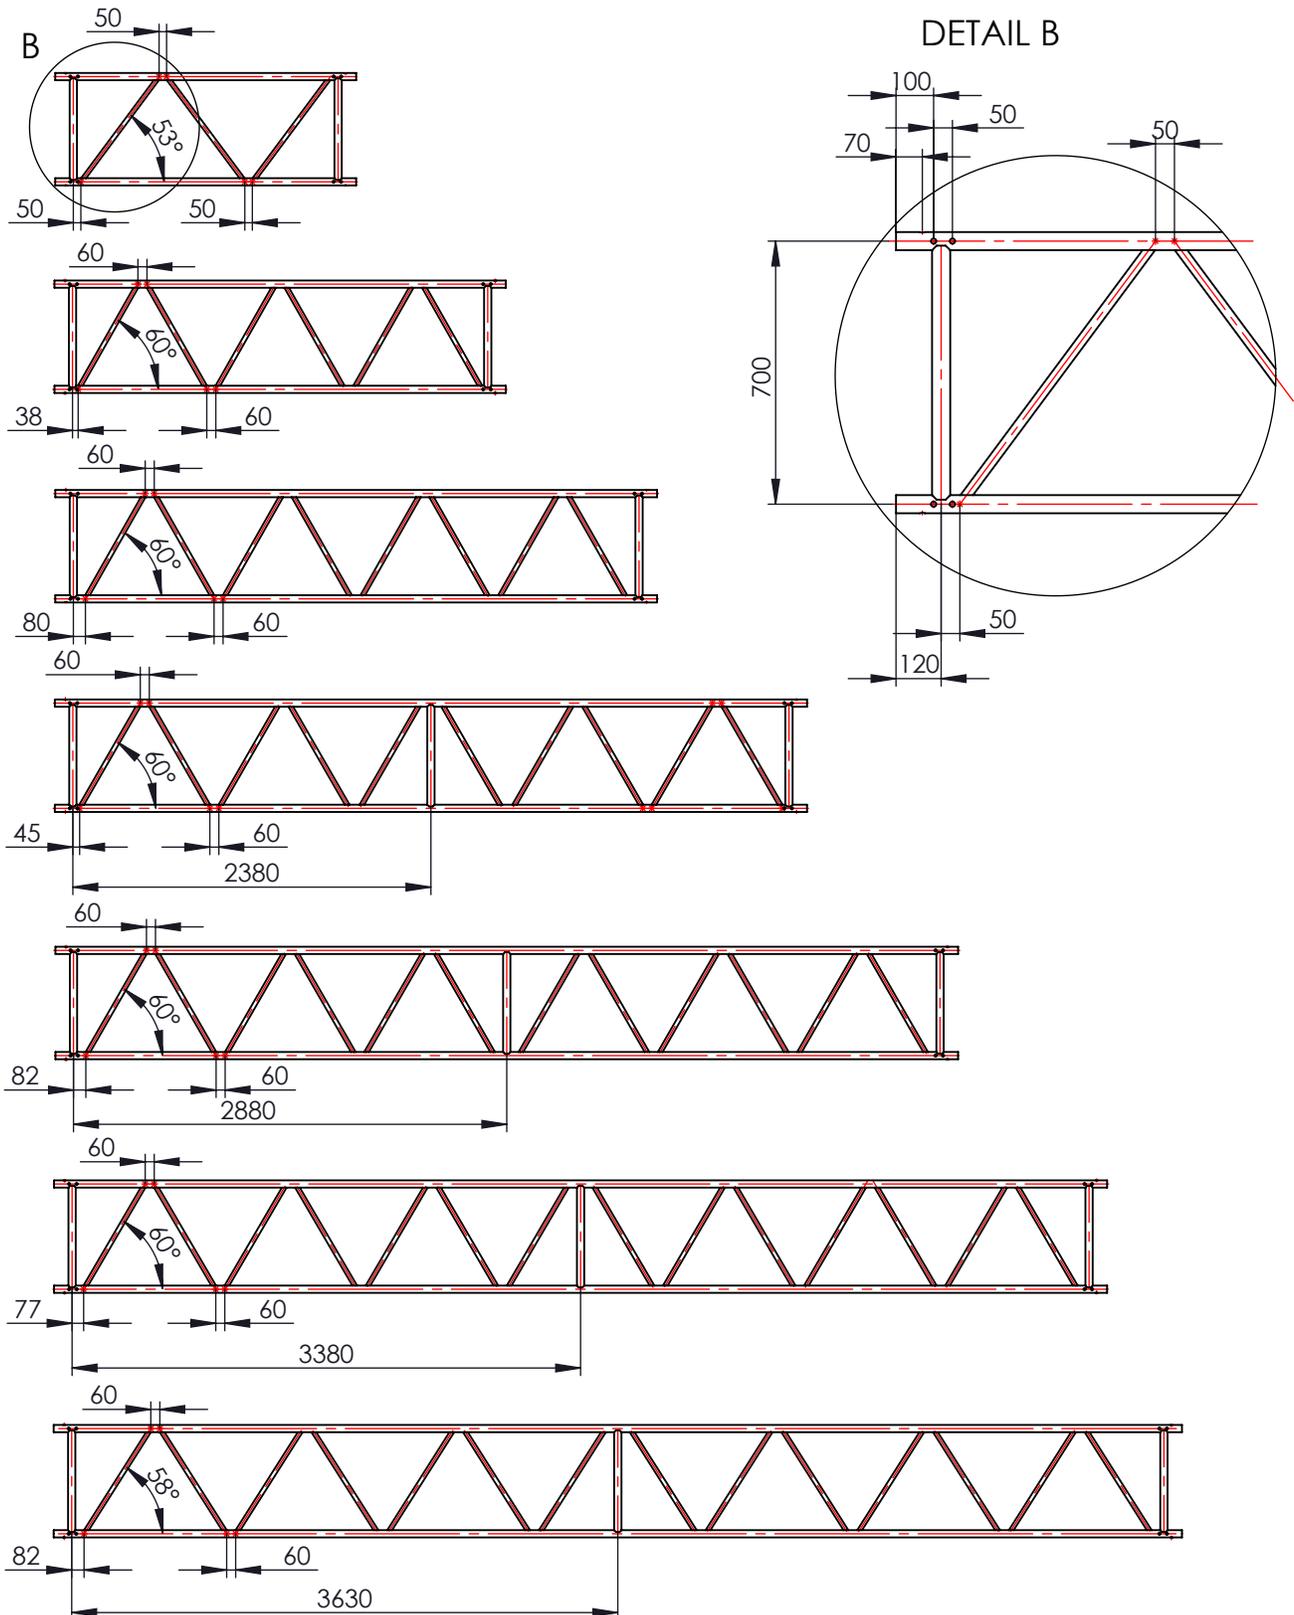


Stahl- Gitterträger Bauhöhe 700 mm
Gurtrohre $\varnothing 48,3 \times 3,2$ mm, S235, Pfostenrohre $\varnothing 48,3 \times 3,2$ mm, S235, Fachwerk- Streben $\varnothing 26,9 \times 2,6$, S235

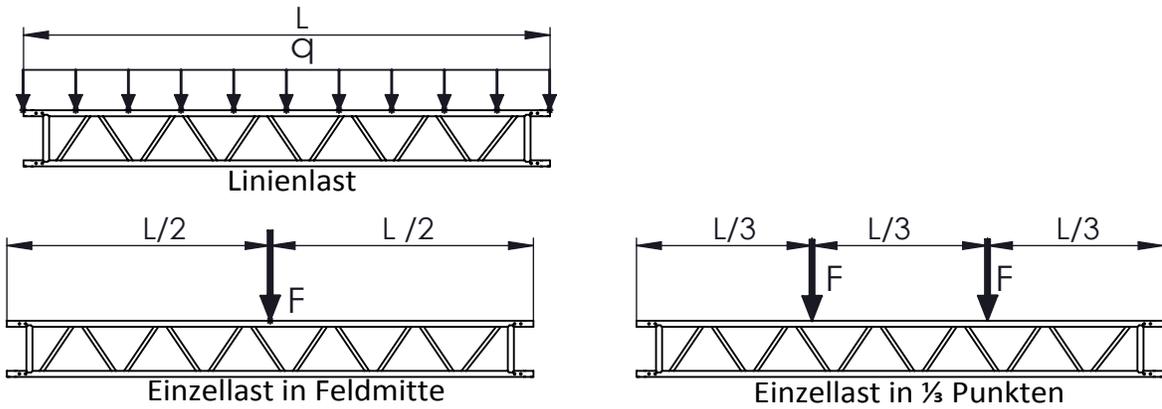

| Länge [mm] | Artikel Nr. | Gewicht [kg] |
|-------------|-------------|--------------|
| 700x2000 mm | 00781 | 27,0 |
| 700x3000 mm | 00782 | 31,0 |
| 700x4000 mm | 00783 | 42,0 |
| 700x5000 mm | 00784 | 50,0 |
| 700x6000 mm | 00785 | 60,0 |
| 700x7000 mm | 00786 | 69,0 |
| 700x7500 mm | 00787 | 75,0 |

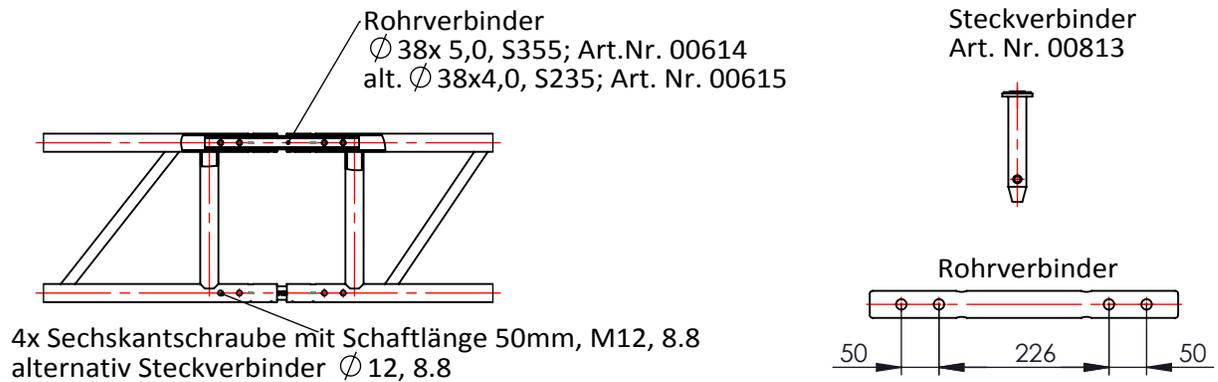

| Spannweite | Abstand | Einzellast Feldmitte | Abstand | Linienlast | Abstand | Einzellasten 1/3 Pkt. |
|------------|---------|----------------------|---------|------------|---------|-----------------------|
| [m] | a[m] | F[kN] | a[m] | q[kN/m] | a[m] | F[kN] |
| 4,00 | 2,00 | 17,07 | 2,00 | 6,43 | 2,00 | 12,80 |
| 5,00 | 1,25 | 23,67 | 1,25 | 5,14 | 1,25 | 12,80 |
| | 2,50 | 8,75 | 2,50 | 3,51 | 2,50 | 6,58 |
| 6,00 | 1,50 | 16,82 | 1,50 | 4,28 | 1,50 | 12,59 |
| | 2,00 | 11,40 | 2,00 | 3,79 | 2,00 | 8,53 |
| 7,00 | 1,75 | 12,32 | 1,75 | 3,52 | 1,75 | 9,25 |
| 7,50 | 1,25 | 15,81 | 1,25 | 3,52 | 1,25 | 11,87 |
| | 2,50 | 5,85 | 2,50 | 1,56 | 2,50 | 4,39 |